

O'pro +

DUGOTRAJNI GRIJAČ ZAHVALJUJUĆI O'PRO TEHNOLOGIJI

MODELI 50, 80 I 100 L



PREDNOSTI

- Dugi vijek trajanja spremnika zahvaljujući ekskluzivnoj O'pro antikoroziivnoj zaštiti
- Novi LED indikator grijanja i gumb za kontrolu temperature u obliku kapljice vode
- Spremnik s emajlom dijamantne kvalitete za dugi vijek trajanja i pouzdanost
- Optimizirani difuzor ulaza vode za veću i kontinuiranu opskrbu toplom vodom

**O'Pro**
TECHNOLOGY**+** JEDNOSTAVNO PROGRAMIRANJE POMOĆU KONTROLNOG GUMBALED INDIKATOR S
KAPLJICAMA VODE
I KONTROLA
GUMBOM**Easy-to-use:**

- Kontrolna tipka za veću uštedu energije i LED indikator s kapljicama vode koji pokazuje kada se voda zagrijava.

O'Pro +

MODELI 50, 80 I 100 L

+ DOKAZANA KVALITETA S O'PRO TEHNOLOGIJOM

1 Visokokvalitetna emajlirana površina


2 Hlzoacijska pjena visoke gustoće
(free of CFC)3 Bakreni grijaći element I
čahura termostata

4 Termostat

5 Magnesium anoda


6 Optimizirana izlazna cijev
od nehrđajućeg čelika

7 Optimizirani ulazni difuzor

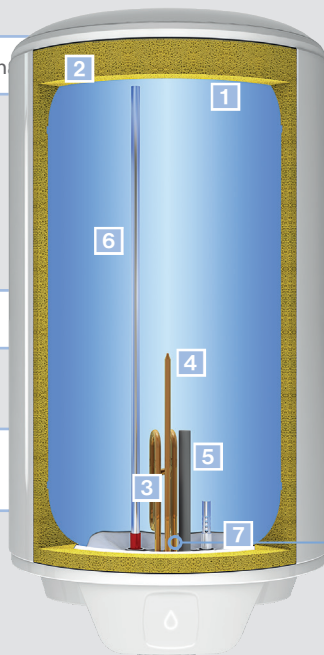

O'Pro
TECHNOLOGY
EXCLUSIVE
ANTI-CORROSIVE SYSTEM

O'Pro tehnologija koristi omski otpornik. On uravnotežuje električne potencijale i spremnika i grijaćeg elementa. Time se znatno povećava vijek trajanja magnezijeve anode i pojačava zaštita od korozije.

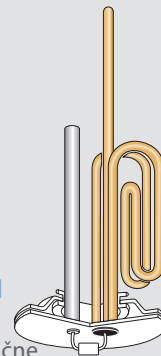

Tehnički podaci

Model	Output (W)	Voltage (V)	GRP (kWh/24h)	Heat-up time at 60°C (Δt=50°C)	Profile	ESMA rating
Vertical wall-mounted						
50	1500	220-240		2h07	M	C
80	1500	220-240		3h24	M	C
100	1500	220-240		4h15	L	C

Instalacijske dimenzije

Model	Dimensions (mm)									Net weight (kg)
	A	B	C	D	E	F	G	I	J	
Vertical wall-mounted										
50	607	433	395	450	158	300	240			15,2
80	806	433	605	450	158	300	240			19,7
100	1008	433	747	450	158	300	240			23,5

