

→ Sustav reverzne osmoze s 5 stupnjeva



RO COMERCIAL 500

(Ref. 450685)

SPECIFIKACIJE

TEŽINA	12 kg
TEMPERATURA	40°C / 2°C
TDS	2000 ppm
ULAŽNI TLAK	1-2,5 bar (100 - 250 kPa)
MEMBRANA	(x3) 400 GPD
PUMPA	Pump Booster
NAPAJANJE	5A = 120 W
NAPAJANJE	110-240V. 50/60Hz: 24Vdc
PROIZVODNJA MEMBRANE	400 GPD (1560LPD)*Scalable water with 250 ppm 25°C. 15% conversion

VIŠOKA
UČINKOVITOSTKONTROLA
TLAKAKAPSULIRANA
MEMBRANAIZRAVNI
PROTOK

VISOKOUČINKOVITI MOTOR

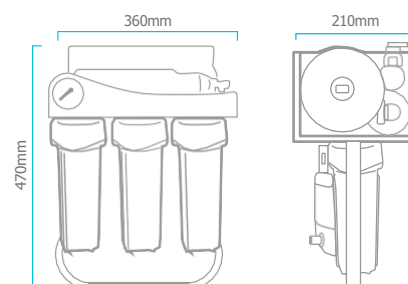


MIJEŠAJUĆI VENTIL

AUTOMATSKO
ISPIRANJEIZRAVAN
PRISTUP

ORIGINAL POTROŠNI MATERIJAL

Opcionalno. Regulator tlaka (Ref. 953164). UV Lampa (Ref. 243600)
Filter: karbon Block (Ref. 214000) karbon Gac (Ref. 213600) sediment 5µ (Ref. 214000)
Membrana. 3013- 400 GDP (Ref. 292707)


EQUIPO
UNE 149101
CERTIFICADO

 MEMBER

Water Quality
 ASSOCIATION

 Acreditado por ENAC
 Certif. nº 34/520014/0712

 WLG (B-60326279), is a member of
 the Water Quality Association.

 The marketing of water treatment
 equipment and household appliances,
 as well as the provision of non-regulated
 training related to the technology of the
 equipment marketed, are certified and
 comply with the UNE-ISO-9001
 standard for WLG (B-60326279).

 WLG (B-60326279) is a member of
 Aqua España, which belongs to Aqua
 Europa (Federation of European
 national associations).

 WLG (B-60326279), has been
 granted Authorised Economic
 Operator (AEO) authorisation
 number ESAE0F1800008U6 and
 the authorisation came into force on
 13/02/2018.