




BLOKIRA KAMENAC
ŠTITI CIJEVI
SMANJUJE POTROŠNJU

ScaleArmor® POP


BLOKIRA KAMENAC - ŠTITI CIJEVI - SMANJUJE POTROŠNJU

ScaleArmor® POP je sistem koji sprječava nakupljanje kamenca dokazanom efikasnošću. ScaleArmor® POP sprječava stvaranje kamenca i naslaga na površinama, a također smanjuje nakupljanje kamenca u cijevima. Ne omekšava vodu, ali sprječava rast kristala kalcijum i magnezijum karbonata koji formiraju kamenac. ScaleArmor® POP je komplet spreman za upotrebu koji sadrži: kućište, kertridž, ključ, zidni nosač, o-prsten, mazivo i uputstvo.

 TOČKA ULAZA  HLADNA VODA

 MAKSIMALNI RADNI PRITISAK
8 bara (113 psi)

 MAKSIMALNA RADNA TEMPERATURA
45°C (113°F)
MINIMALNA RADNA TEMPERATURA
4°C (39,2°F)

 MAKSIMALNA UKUPNA TVRDOĆA
50°F (500 ppm CaCO₃)

 MAKSIMALNA BRZINA PROTOKA
POP 10: 1500 L/h (6.6 GPM)
POP 20: 2300 L/h (10.1 GPM)

POGODNOST

-DOKAZANO SPRJEČAVANJE KAMENCA

-KONTINUIRANA EFEKTIVNOST DO 12 MJESECI

-RADI NA VIŠIM TEMPERATURAMA

- Maks 45°C - 113°F | Min 4°C - 39.2°F

-EKOLOŠKI PRIHVATLJIVO:

- SMANJUJE POTROŠNJU ENERGIJE
- MATERIJALI KOJI SE MOGU RECIKLIRATI

SPECIFIKACIJE

Odabrane sirovine, pogodne za vodu za piće.

Glava: ojačani polipropilen.

Posuda: PET.

O-prstenovi: EPDM.

Odzračni ventil: tijelo od nehrđajućeg čelika, EPDM o-prsten.


Priključak s kalibrom CW 511 L mesing Filter medij: ScaleArmor®.

UKLJUČENA DODATNA OPREMA




POP 10

TIP NAVOJA



-OT-
BRASS BSPP




-IN-
PLASTIC BSPP


ScaleArmor™ Systems



POP 20



Testovi provedeni na ScaleArmor® POP 10 sistemu. Režim testiranja: 20°C, 3 BARA

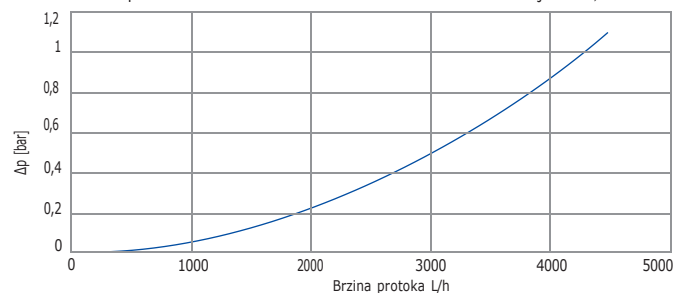

ScaleArmor® POP

KUĆIŠTA S PLASTIČNIM I BSPP NAVOJIMA OD MESINGA

DIO BROJ	MODEL	ODGOVA-RAJUĆI KERTRIDŽ	ULAZ/IZAZ	MAKSIMALNA BRZINA PROTOKA	DIMENZIJE mm		
					A	B	C
ZA1380552	POP10 ScaleArmor® System 3/4 IN	10"	3/4" plastic	1500 L/h	325	122	107
ZA1380532	POP10 ScaleArmor® System 3/4 OT	10"	3/4" brass	1500 L/h	325	122	107
ZA1381552	POP20 ScaleArmor® System 3/4 IN	20"	3/4" plastic	2300 L/h	577	122	107
ZA1381532	POP20 ScaleArmor® System 3/4 OT	20"	3/4" brass	2300 L/h	577	122	107
ZA1380652	POP10 ScaleArmor® System 1 IN	10"	1" plastic	1500 L/h	325	122	107
ZA1380632	POP10 ScaleArmor® System 1 OT	10"	1" brass	1500 L/h	325	122	107
ZA1381652	POP20 ScaleArmor® System 1 IN	20"	1" plastic	2300 L/h	577	122	107
ZA1381632	POP20 ScaleArmor® System 1 OT	20"	1" brass	2300 L/h	577	122	107



ZAMJENSKI KERTRIDŽ DOSTUPAN

DIO BROJ	MODEL
RA5195123	P 10 ScaleArmor®
RA5197123	P 20 ScaleArmor®

CERTIFIKATI:



Kućišta su testirana i certificirana po najstrožim procedurama širom svijeta, u skladu sa sanitarnim certifikatima DM25 - Italija- EAC/Ghostregistrazia - Rusija - i ACS - Francuska-



Scale Armor® medij je certificiran od strane IAPMO R&T u skladu sa IAPMO Z601 zahtjevima za sigurnost materijala.