

O'Pro +

DUGOTRAJNI GRIJAČ ZAHVALJUJUĆI O'PRO TEHNOLOGIJI

MODELI 50, 80 I 100 L



PREDNOSTI

- Dugi vijek trajanja spremnika zahvaljujući ekskluzivnoj O'pro antikoroziivnoj zaštiti
- Novi LED indikator grijanja i gumb za kontrolu temperature u obliku kapljice vode
- Spremnik s emajlom dijamantne kvalitete za dugi vijek trajanja i pouzdanost
- Optimizirani difuzor ulaza vode za veću i kontinuiranu opskrbu toplom vodom



O'Pro
TECHNOLOGY

+ JEDNOSTAVNO PROGRAMIRANJE POMOĆU KONTROLNOG GUMBA



LED INDIKATOR S
KAPLJICAMA VODE
I KONTROLA
GUMBOM



Easy-to-use:

- Kontrolna tipka za veću uštedu energije i LED indikator s kapljicama vode koji pokazuje kada se voda zagrijava.

O'Pro +

MODELI 50, 80 I 100 L

+ DOKAZANA KVALITETA S O'PRO TEHNOLOGIJOM

 Visokokvalitetna emajlirana površina


 Hlzlacijska pjena visoke gustoće
(free of CFC)

 Bakreni grijači element I
čahura termostata

 4 Termostat


 Magnesium anoda

 6 Optimizirana izlazna cijev
od nehrđajućeg čelika

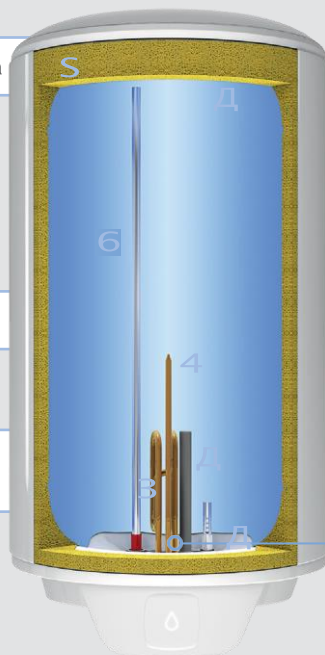 Optimizirani ulazni difuzor


O'Pro
TECHNOLOGY
EXCLUSIVE
ANTI-CORROSIVE SYSTEM

O'Pro tehnologija koristi omski otpornik. On uravnotežuje električne potencijale i spremnika i grijaćeg elementa. Time se znatno povećava vijek trajanja magnezijeve anode i pojačava zaštita od korozije.

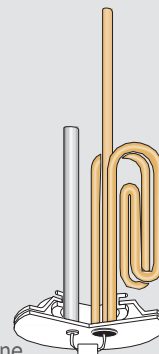

Tehnički podaci

Model	Output (W)	Voltage (V)	QRP (kWh/24h)	Heat-up time at 60°C (Δt=50°C)	Profile	ESMA rating
Vertical wall-mounted						
50	1500	220-240		2h07	M	C
80	1500	220-240		3h24	M	C
100	1500	220-240		4h15	L	C

Instalacijske dimenzije

Model	Dimensions (mm)									Net weight (kg)
	A	B	C	D	E	F	G	I	J	
Vertical wall-mounted										
50	607	433	395	450	158	300	240			15,2
80	806	433	605	450	158	300	240			19,7
100	1008	433	747	450	158	300	240			23,5

