

Galapagos Smart Pilot IO

SMART THERMOFLUIDNI RADIJATOR KOJI DAJE UGOĐAJ
CENTRALNOG GRIJANJA



+ PROIZVOD

KOMFORT

- Homogena i blaga difuzija topline
- Tehnologija termofluida osigurava dugotrajnu blagu toplinu
- Daljinsko upravljanje putem pametnog telefona ili tableta
- zahvaljujući Cozytouch kompatibilnosti

UŠTEDA

- Do 45% uštede energije putem najboljih digitalnih kontrola, programiranja i senzora odsutnosti / prisutnosti
- Smart Pilot funkcije pamćenje životnog ritma korisnika, funkcije za udobnost i optimalnu uštedu energije
- Opcija / otvorenog/zatvorenog prozora prebacivanje na Anti-frost način rada čim se otvori prozor
- 6 funkcija upravljanja: Comfort, Comfort - 1°C, Comfort - 2°C, Eco, Anti-frost, Off
- Pokazatelj potrošnje energije za odgovornu i informiranu uporabu radijatora
- ErP-priprema

USER-FRIENDLINESS

- LCD digitalna kontrola koja pokazuje temperaturu i potrošnju energije
- ASP (Anti-Staining Process) za smanjivanje mrlja na zidu i opremi
- Jednostavna montaža: vertikalni nosač u obliku slova H
- Mogućnost programiranja

DESIGN

- ARaspoloživ u horizontalnoj i vertikalnoj izvedbi
- Aluminijski prednji panel sa modernim dizajnom
- Boja: Bijela (RAL 9016)

GENTLE HEAT RADIATOR

750 TO 2000 W
(HORIZONTAL)

1000 TO 1800 W
(VERTICAL)

700 TO 1400 W
(PLINTH)



Raspoložive izvedbe



Digitalni upravljač



Ušteda energije




Smart Pilot

Tehnologija



Tekućina koja provodi toplinu


Galapagos Smart Pilot IO



- 1 Energy consumption indicator
- 2 Menu button to access various functions
- 3 Smart Pilot functions*
- 4 Open/closed window detection function and presence/absence sensor*
- 5 LCD screen showing temperature current heating mode and functions
- 6 Menu navigation, temperature & active mode-setting buttons

- 1. Digitalne kontrole
- 2. Kolektori s tekućinom koja provodi toplinu
- 3. Senzor sobne temperature
- 4. Aluminijki prednji panel
- 5. Obloženi grijaći element
- 6. Sensor pokreta

INSTALLATION DIMENSIONS

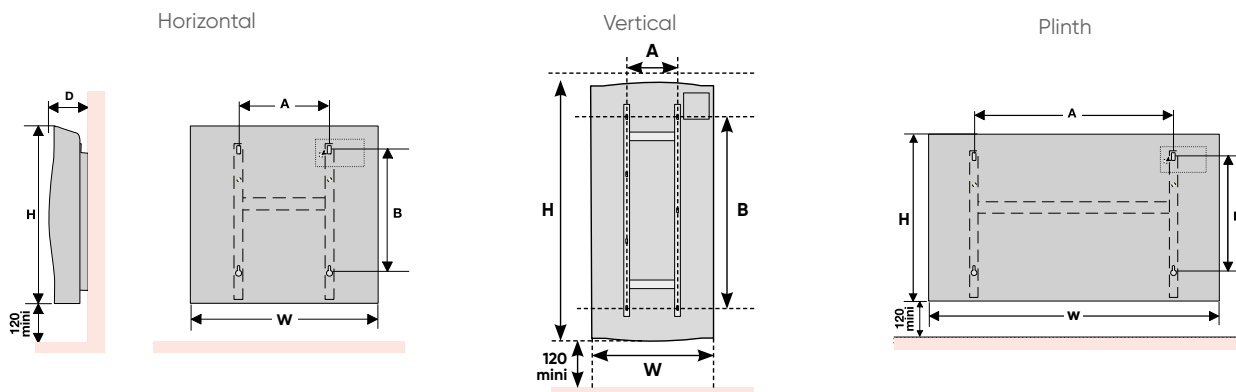

TECHNICAL DATA

OUTPUT (W)	DIMENSIONS (mm)					NET WEIGHT (Kg)
	WIDTH (W)	HEIGHT (H)	DEPTH (D)	A	B	
Galapagos Smart Pilot IO Horizontal						
750	672	590	132	300	354	13
1000	772	590	132	400	354	15
1250	972	590	132	600	354	19
1500	1072	590	132	700	354	21
2000	1372	590	132	800	354	27
Galapagos Smart Pilot IO Vertical						
1000	460	1290	131	320	1021	24
1500	460	1590	131	320	1321	29
1800	460	1800	131	320	1521	33
Galapagos IO Plinth						
700	771	388	133	400	158	11
1000	971	388	133	600	158	15
1400	1371	388	133	800	158	21

* Not available for Galapagos IO Plinth